


P. C. B LAYOUT

■ SPECIFICATION


- Voltage rating: 250V AC, DC
- Current Rating: 7A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 10mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

■ WAFER

- Material: Base: Nylon 66 UL94V-2
pin: Brass Tin-plated

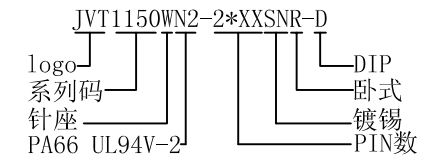

PIN	DIM. (mm)	
	A	B
2*1	--	5.60
2*2	4.20	9.80
2*3	8.40	14.00
2*4	12.60	18.20
2*5	16.80	22.40
2*6	21.00	26.60
2*7	25.20	30.80
2*8	29.40	35.00
2*9	33.60	39.20
2*10	37.80	43.40
2*11	42.00	47.60
2*12	46.20	51.80

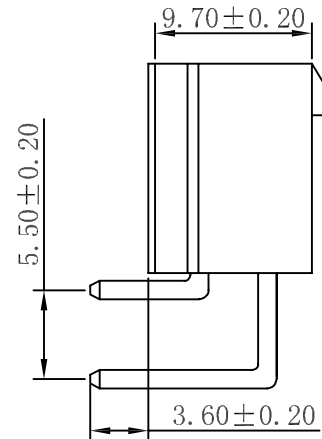

GENERAL TOLERANCE			
0	±0.35		
.0	±0.30		
.00	±0.20		
.000	±0.10		

版本	变更内容	日期	乔业电子有限公司 CHYAO YEE CONNECTORS CO., L TD		单位	mm	比例	1:1	日期	20130601
----	------	----	---------------------------------------------------	--	----	----	----	-----	----	----------

核准	审核	绘图	品名	MLX4, 2mm WAFER		
	bolly	许向毅	料号	JVT1150WN2-2*XXSNR-D		
			图名	011	版本	A